

ingenico

DESK/1700

Provide customers with autonomy and security at the check-out



- Connect easily to the AXIUM DX4000 Desktop allowing a smart and unified consumer-facing solution
- Manage customer interface for any type of payment at the latest standards
- Integrate with any counter space thanks to a compact and sleek design



Easy to integrate into any counter-space and reliable, the Desk/1700 is an intuitive PIN Pad speeding customers through check-out.

Optimized for payment

- All payment methods accepted
- An easy-to-identify contactless reader
- A large keypad for a seamless the PIN entry

Easy connectivity to AXIUM DX4000 Desktop thanks to one single connector


Robust and reliable device

- Display with glass lens
- High-performance card & swipe insertion

Compact design to fit easily on any counter

Highest security

- PCI PTS v6
- Optional PCI certified privacy shield

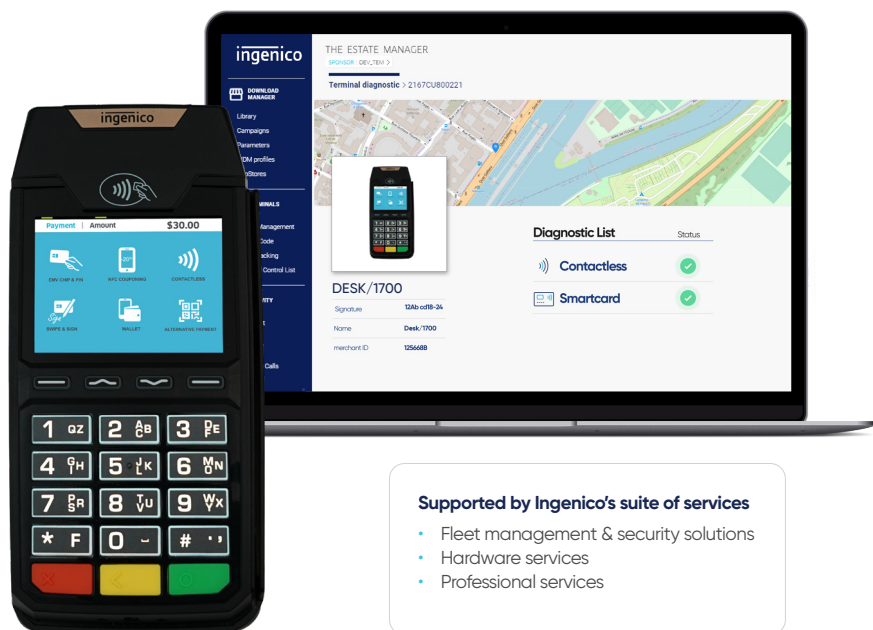

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

Specifications

OS		• Telium TETRA	✓	Terminal Connections	• HDMI	• IDMI	✓
Memory	• Internal	• 256 MB Flash, 128 MB RAM	✓	Terminal Connections via Accessories	• USB	• USB Host	✓
Processor	• Application & Crypto processor	• Cortex A7	✓		• Powered USB	• USB Slave	✓
Card readers	• Magnetic card reader	• ISO 1/2/3 (500K reads lifespan bi-directional swiping)	✓	Stand Mounting	• Universal Payment Mount	• 5V and 12V	✓
	• Smart Card	• EMV L1 (500K reads lifespan)	✓	Privacy PIN shield	• Standard privacy shield	• PCI PTS certified (factory mounted)	Option
	• Contactless	• EMV Contactless L1 3.0 certified	✓	Terminal Size	• Terminal only	• 167x82x40mm (6.6x3.2x1.6")	✓
Display		• 2.8"backlight, glass lens, QVGA (320x240 pixels)	✓	Terminal Weight	• Terminal full option without PINshield	• 231g (8.1oz)	✓
Keypad	• Physical keys	• 15 keys, raised markings, backlit	✓	Environment	• Operating temperature	• 0 to +45°C (32°F to 122°F)	✓
		• 4 function keys	✓		• Storage temperature	• -20 to +55°C (-4°F to 158°F)	✓
Audio	• Buzzer		✓		• Operating humidity	• 85% HR at +40°C (104°F)	✓
Security	• PCI PTS	• PCI PTS V6 certified	✓				
	• Anti-removal	• Active connector removal	✓				
	• Anti-theft	• Secured lock receptacle	✓				

